





OCTOLUBERR STIRRER
TYPE PUMPS



OCTOLUBERR FOLLOWER
TYPE PUMPS

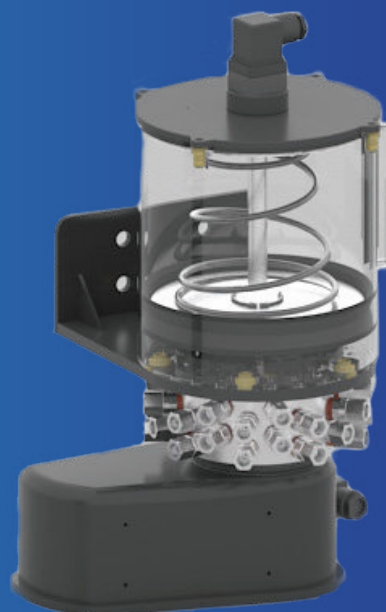

STIRRER

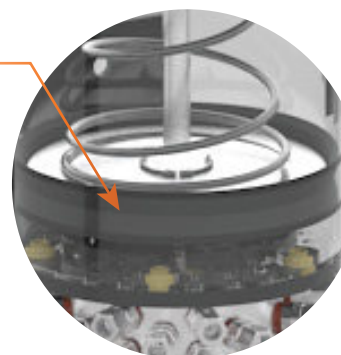

FOLLOWER

OCTOLUBERR – Multi line lubrication systems are designed to provide lubricant for lube points on industrial and mobile equipment. It considerably reduces the cost of maintenance on machinery on which they are installed these OCTOLUBERR pumps. OCTOLUBERR has been designed to provide pumping solution individually without any metering devices involved to deliver the lubricant to lubrication points. The easily exchangeable pumping elements are usually operated by eccentric cam. By selecting pumping elements with different piston diameters and/or stroke, an individual lubrication volume per pump outlet is possible

RIKKON GROUP OF COMPANIES



Technical Specification



Operating Voltage	12 V - 24 V DC
Current	1 A - 0.05 A
No. of Outlets	32
Working Pressure	120 Bar
Reservoir Capacity	2 Kg
Max Grease capability	NLGI 1
Noise	< 70db (A)
Outlet Thread	M10 X 1P Taper Thread



Pumping Unit Specification


We Offer 5 Output CC Variants

1. 0.02 CC White band (**SA070**)
2. 0.05 CC Black band (**SA071**)
3. 0.08 CC Yellow band (**SA647**)
4. 0.1 CC Red band (**SA648**)
5. 0.15 CC Blue band (**SA649**)

Orders can be taken with part number in bracket



Applications

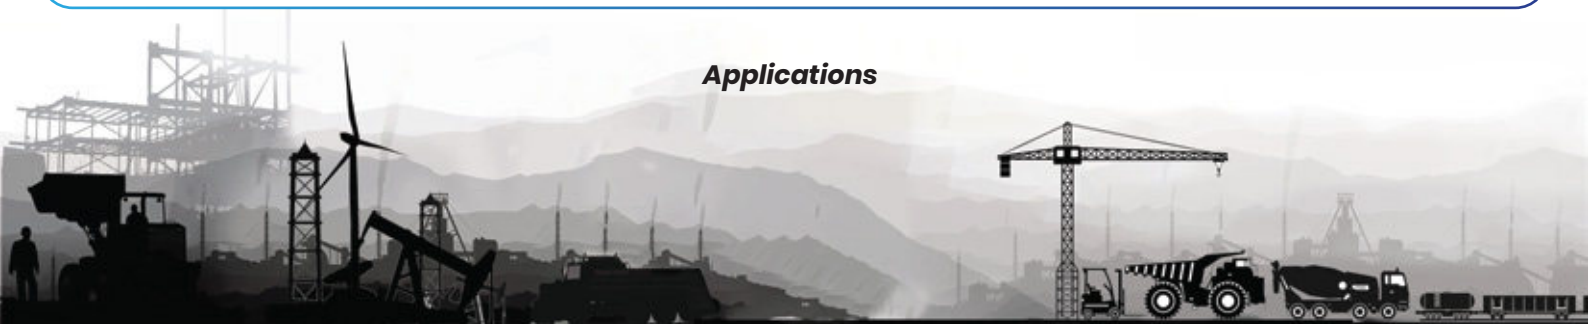

contact us



No: 203, Nageswara Rao Road, 2nd extrn.,
Athipet, Ambattur, Chennai - 600 058
Tamil Nadu, INDIA

info@rikkongroup.com / sales@rikkongroup.com
www.rikkongroup.com / www.luberr.in



contact person :

catalogue no: 10-EN-1064-02