


SVM 35B INJECTORS


Luberr SVM35B Oil Injectors are positive displacement injectors. SVM 35B injectors gets filled when the system is pressurized, and inject the lubricant when the system pressure is relieved. This product is suitable for volumetric periodic lubrication systems with a working pressure of 1.75 - 2.5 Mpa.

These injectors deliver a fixed, predetermined quantity of lubricant to each lubricant point. The SVM 35 B model is available with single 2, 3 , 4 and 5 outlets. Discharge of each outlet can be freely selected within a specified range. An unused outlet may be blocked with a special plug. This product is widely used in lubrication systems for printing , plastics , packing and machining tools etc.

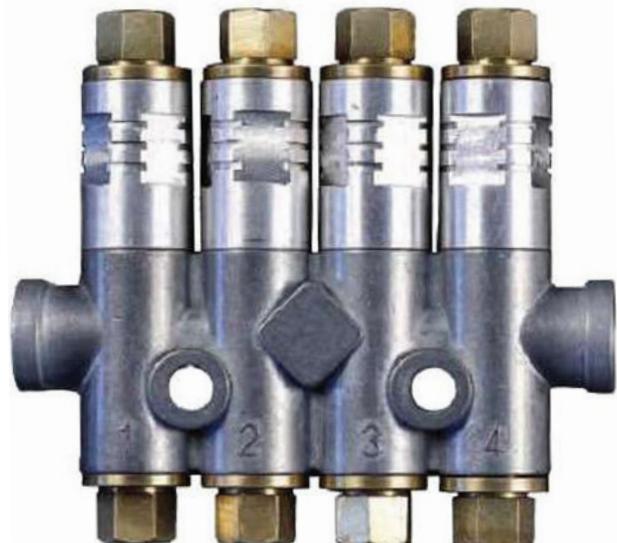

Dimensional specification

Discharge size code	A	B	C	D	E	F	G
Product printing mark	03	06	10	20	30	40	50
Discharge (ml / cyc)	0.03	0.06	0.1	0.2	0.3	0.4	0.5

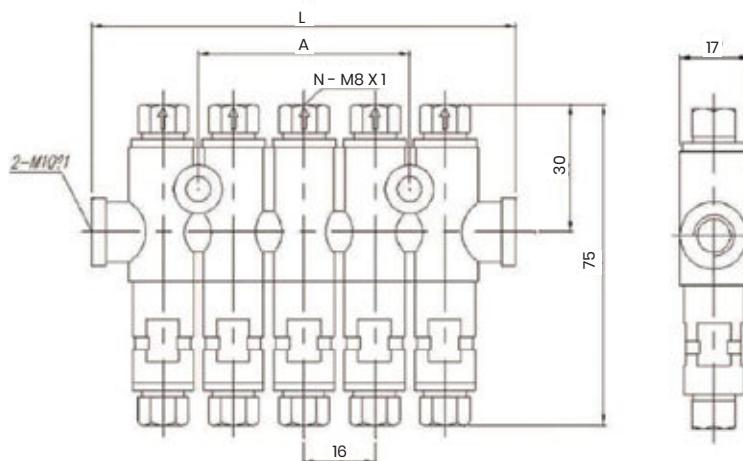

RIKKON GROUP OF COMPANIES



TECHNICAL DATA AND PART NUMBER

MODEL	SVM35B				
NO OF OUTLETS	1	2	3	4	5
OUTPUT (ml / cycle)	0.03 / 0.06 / 0.1 / 0.2 / 0.3 / 0.4 / 0.5				
RIKKON PART CODE 0.03 ml / cycle	SVM350103T	SVM350203T	SVM350303T	SVM350403T	SVM350503T
RIKKON PART CODE 0.06 ml / cycle	SVM350106T	SVM350206T	SVM350306T	SVM350406T	SVM350506T
RIKKON PART CODE 0.1 ml / cycle	SVM350110T	SVM350210T	SVM350310T	SVM350410T	SVM350510T
RIKKON PART CODE 0.2 ml / cycle	SVM350120T	SVM350220T	SVM350320T	SVM350420T	SVM350520T
RIKKON PART CODE 0.3 ml / cycle	SVM350130T	SVM350230T	SVM350330T	SVM350430T	SVM350530T
RIKKON PART CODE 0.4 ml / cycle	SVM350140T	SVM350240T	SVM350340T	SVM350440T	SVM350540T
RIKKON PART CODE 0.5 ml / cycle	SVM350150T	SVM350250T	SVM350350T	SVM350550T	SVM350550T



contact us



No: 203, Nageswara Rao Road, 2nd extn.,
Athipet, Ambattur, Chennai - 600 058
Tamil Nadu, INDIA

 info@rikkongroup.com / sales@rikkongroup.com
 www.rikkongroup.com / www.luberr.in

contact person :

